

# Anatomical triangulation: from sparse landmarks to dense annotation of the skeleton in CT images

Marie Bieth<sup>12</sup>  
marie.bieth@tum.de  
Rene Donner<sup>3</sup>


Georg Langs<sup>3</sup>

Markus Schwaiger<sup>1</sup>

Bjoern Menze<sup>2</sup>

<sup>1</sup> Nuclear Medicine  
Klinikum Rechts der Isar  
Munich, Germany  
<sup>2</sup> Department of Computer Science  
TU Munich  
Munich, Germany  
<sup>3</sup> Department of Biomedical Imaging and  
Image-guided Therapy, CIR Lab  
Medical University of Vienna  
Vienna, Austria

## 1 Structure weighted Dice scores

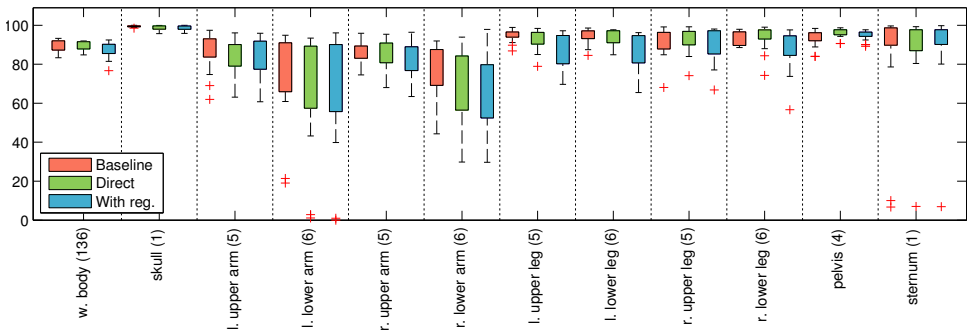

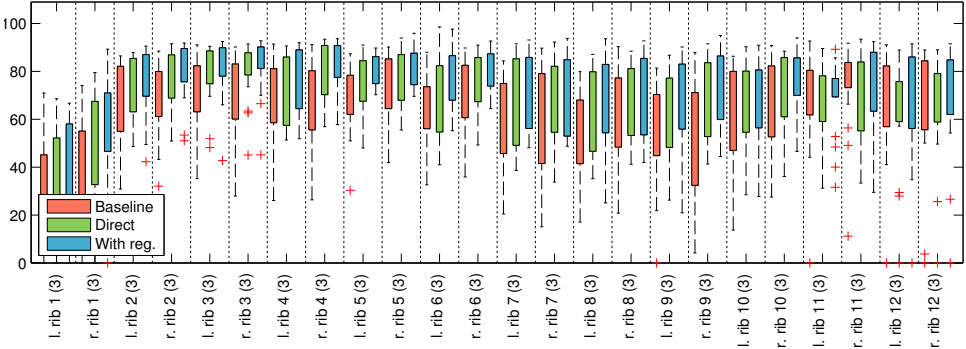
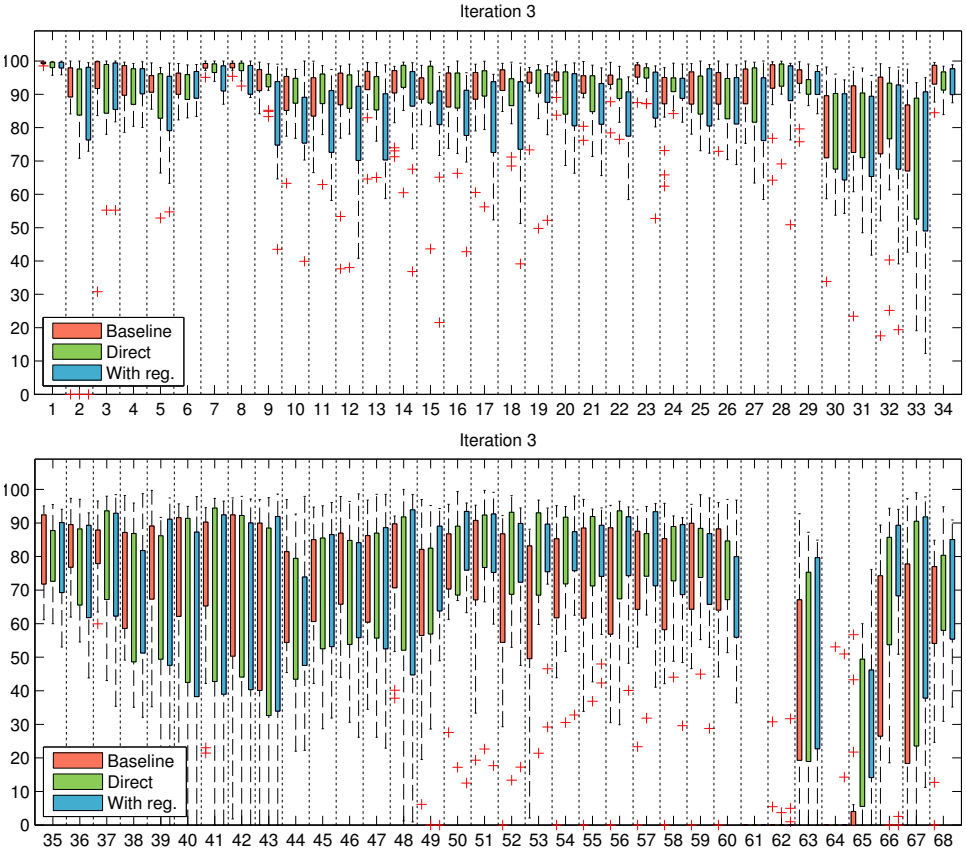


Figure 1: Weighted Dice scores for the segmentation of different groups of substructures by the baseline-random forest (red), after 3 iterations without centroid regularization (green), after three iterations with centroid regularization (blue). The total number of substructures of each group is given in brackets.

## 2 Substructures weighted Dice scores



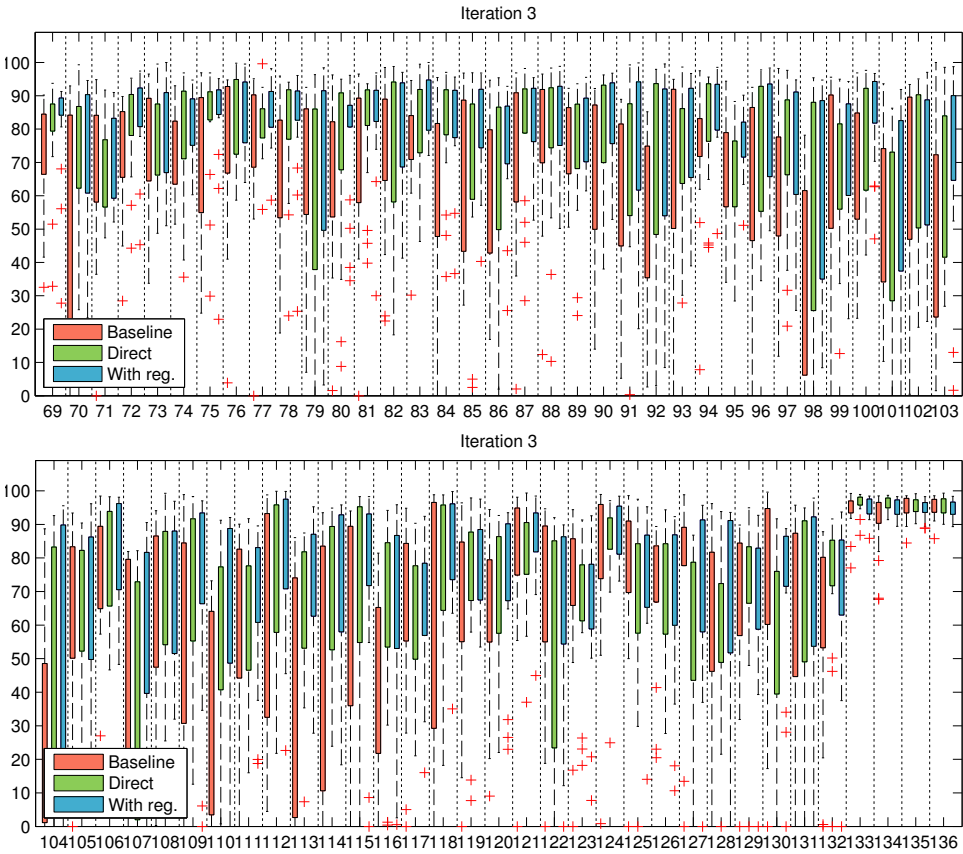


Figure 2: Weighted Dice scores for the segmentation of all individual substructures by the baseline-random forest (red), after 3 iterations without centroid regularization (green), after three iterations with centroid regularization (blue).